

Paint additives and aqueous paint composition.

Patent Number: EP0586048
Publication date: 1994-03-09
Inventor(s): ICHINOHE SHOJI (JP); ONO ICHIRO (JP)
Applicant(s):: SHINETSU CHEMICAL CO (JP)
Requested Patent: ☐ EP0586048, ☐ B1
Application Number: EP19930305010 19930628
Priority Number(s): JP19920212092 19920716
IPC Classification: C09D5/02 ; C09D7/12 ; C08L83/06
EC Classification: C09D5/02K, C09D7/06, C08G77/04B, C08G77/38
Equivalents: DE69300806D, DE69300806T, JP2616640B2, ☐ JP6033005, ☐ US5306341

Abstract

An additive comprising a triglycerol-modified silicone compound as an active ingredient is added to aqueous paint compositions for reducing the surface tension thereof for ensuring formation of a smooth coating free of defects.

Data supplied from the esp@cenet database - I2

BEST AVAILABLE COPY

✓ On ()



Europäisches Patentamt

European Patent Office

Office européen des brevets



Publication number : **0 586 048 A1**

12

EUROPEAN PATENT APPLICATION

21 Application number : 93305010.6

51 Int. Cl.⁵ : **C09D 5/02, C09D 7/12,**
C08L 83/06

22 Date of filing : 28.06.93

30 Priority : 16.07.92 JP 212092/92

43 Date of publication of application :
09.03.94 Bulletin 94/10

84 Designated Contracting States :
DE FR GB

71 Applicant : **Shin-Etsu Chemical Co., Ltd.**
6-1, Otemachi 2-chome
Chiyoda-ku Tokyo 100 (JP)

72 Inventor : **Ono, Ichiro**
787-2, Yanase
Annaka-shi, Gunma-ken (JP)
Inventor : **Ichinohe, Shoji**
2-32, Isobe 4-chome
Annaka-shi, Gunma-ken (JP)

74 Representative : **Stoner, Gerard Patrick et al**
Mewburn Ellis 2 Cursitor Street
London EC4A 1BQ (GB)

54 Paint additives and aqueous paint composition.

57 An additive comprising a triglycerol-modified silicone compound as an active ingredient is added to aqueous paint compositions for reducing the surface tension thereof for ensuring formation of a smooth coating free of defects.

EP 0 586 048 A1


This invention relates to an additive to aqueous paint. More particularly, it relates to an additive to aqueous paint for improving the wettability thereof for preventing coating defects such as craters, cissing and pinholes.

Although a great variety of paints are known in the art, most currently used paints are solvent-based paints containing organic solvents as diluents. To meet a growing demand for environmental protection, the paint industry tends toward conversion from solvent base paints causing air pollution to aqueous paints causing less pollution.

Aqueous paints are less polluting and ensure safe application since the diluent is non-toxic, non-dangerous water, but suffer from several drawbacks associated with water. The most serious drawback of aqueous paints is the tendency to form coating defects, such as craters, cissing and pinholes, because of the high surface tension of water. Known approaches for preventing such coating defects include the addition of (1) amphiphatic solvents such as alcohols and Cellosolves®, (2) anionic, cationic, nonionic and ampholytic surface-active agents, and (3) polyether-modified silicone compounds. These additives function to lower the surface tension of paint systems and improve their ability to wet objects to be coated. Additives (2) and (3) are commercially available as aqueous paint additives. However, they are not fully satisfactory.

The object addressed herein is to provide novel compounds, particularly having use as paint additives, and paint additive compositions and aqueous paints comprising such substances. In particular, it would be preferred to reduce the known problems of coating defects such as craters, cissing and pinholes.

In a general aspect, the invention proposes a hydrocarbysiloxane having at least one triglycerol group of the formula



joined to a silicon atom via a hydrocarbon link, typically an alkylene link.

We find that such silicones can be useful as additives for aqueous paints.

In particular aspects, therefore, the invention proposes:

methods of making such silicone compounds;


use of such silicone compounds as an additive for aqueous paint;

a paint additive composition comprising such a silicone compound;

an aqueous paint comprising such a silicone compound, and


a method of making an aqueous paint, comprising blending such a compound in the paint.

The triglycerol-modified silicones are usually as represented by the following general formula (1)

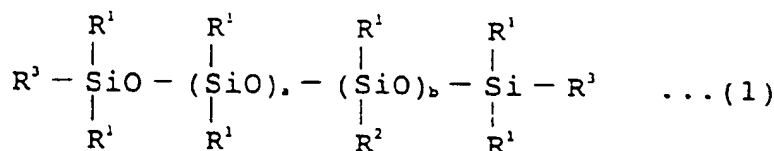

wherein R¹ is a monovalent hydrocarbon group having 1 to 10 carbon atoms,

R² is a group of the following formula (A):



wherein Q is a divalent hydrocarbon group having 2 to 10 carbon atoms,

R³ is a monovalent hydrocarbon group having 1 to 10 carbon atoms or a group of formula (A), and letters a and b are positive integers inclusive of 0, with the proviso that at least one of the R³ groups is a group of formula (A) when b is equal to 0.


In our researches, we found that by adding such triglycerol-modified silicones to aqueous paint systems, such as a water-soluble paint system and an emulsion paint system using water as a dispersion medium, we

were able to lower the surface tension of the paint system and improving the wetting ability thereof, even when using a relatively small amount. The aqueous paint systems having the triglycerol-modified silicone compound added thereto produced a satisfactory coating which was smooth, flat, continuous and free of surface defects such as craters, cissing and pinholes.

Therefore, the present invention also provides an aqueous paint composition comprising an water-soluble paint composition using water as a main diluent or an emulsion paint composition using water as a dispersing medium, and the additive described above.


DETAILED DESCRIPTION

The aqueous paint additive typically comprises triglycerol-modified silicone compound of formula (1) as an active ingredient.


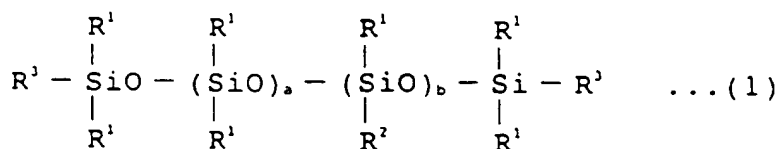


In formula (1), R^1 is a monovalent hydrocarbon group having 1 to 10 carbon atoms, for example, alkyl groups such as methyl, ethyl, propyl, cyclohexyl and decyl groups, aryl groups such as phenyl and tolyl groups, and aralkyl groups such as phenethyl and 2-methylphenethyl groups, with the methyl, ethyl and phenyl groups being preferred.

R^2 is a group of formula (A).




Q in the triglycerol group of formula (A) is a divalent hydrocarbon group having 2 to 10 carbon atoms, typically an alkylene group e.g.




R^3 is a group like R^1 or a group of formula (A).

Letters a and b are integers of 0 or more. Although no upper limit need be imposed, too large molecular weights tend to aggravate compatibility with aqueous paint systems and consequently, a is preferably in the range of 0 to 200 and b is preferably in the range of 0 to 50. Either one or both of the R^3 groups are groups of formula (A) when b is equal to 0.


The triglycerol-modified silicone compound may be prepared as shown by the following reaction scheme, for example, by effecting addition reaction between a triglycerol derivative of formula (2) and an organohydrogenpolysiloxane of formula (3) in the presence of a platinum series catalyst to form an organosilicone compound of formula (4) and removing acetone from the organosilicone compound.

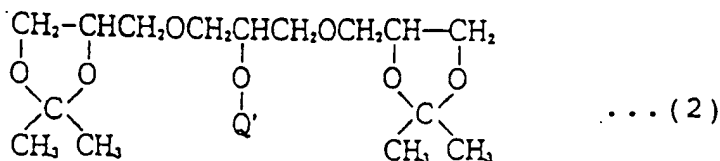

+




addition reaction



acetone removal

Compounds of formula (1)


In the reaction scheme, Q' is a monovalent C₂-C₁₀ hydrocarbon group having a terminal double bond, R⁴ is a group of formula (B):

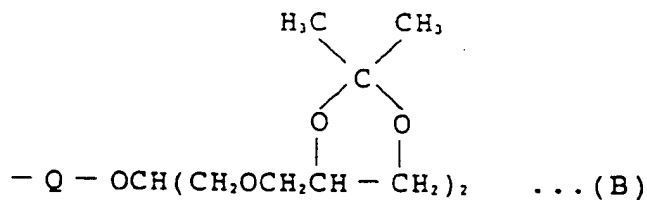

wherein Q is as defined above, R⁵ is a monovalent C₁-C₁₀ hydrocarbon group or a group of formula (B), R⁶ is a monovalent C₁-C₁₀ hydrocarbon group or a hydrogen atom, and R¹, a and b are as defined above.

The acetone removing reaction is generally carried out by adding 0.1 to 0.0001N diluted aqueous hydrochloric acid to the organosilicone compound of formula (4) to render the reaction system weakly acidic, and heating the system to 50 to 100°C. If desired, alcohols such as ethanol and isopropyl alcohol may be added to the system to improve contact between the compound of formula (4) and water.

Alternatively, the triglycerol-modified silicone compound of formula (1) may be prepared by previously removing acetone from a triglycerol derivative of formula (2) to form a triglycerol derivative of formula (5):



wherein Q' is as defined above, and effecting direct addition reaction between the triglycerol derivative of formula (5) and an organohydrogenpolysiloxane of formula (3) in the presence of a platinum series catalyst.

The triglycerol-modified silicone compound may be used by directly adding it to aqueous paint systems. For ease of operation, however, it may be added to aqueous paint systems after diluting it with a solvent because the compound of formula (1) is a highly viscous liquid due to the presence of a triglycerol group.

The diluting solvents used herein are not critical as long as the triglycerol-modified silicone compound is soluble therein and they are compatible with aqueous paint systems. Examples of the solvent include water, methyl alcohol, ethyl alcohol, isopropyl alcohol, t-butyl alcohol, methyl Cellosolve®, ethyl Cellosolve®, butyl Cellosolve®, 3-methyl-3-methoxybutanol, methoxybutanol, methylcarbitol, ethylcarbitol, butylcarbitol, dioxane, methyl Cellosolve® acetate, Cellosolve® acetate, propylene glycol monomethyl ether, acetone, and methyl ethyl ketone alone or in admixture of two or more.

The additive of the invention can be added to any desired aqueous paint compositions including water-soluble paint compositions using water as a main diluent and emulsion paint compositions using water as a dispersing medium. Examples of the water-soluble paint include water-soluble alkyd resin paints, water-soluble acrylic resin paints, water-soluble amino resin paints, water-soluble epoxy ester resin paints, water-soluble maleic polybutadiene resin paints, water-soluble maleic fatty acid ester resin paints, water-soluble maleic oil resin paints, water-soluble phenolic resin paints, and polyvinyl alcohol paints. Examples of the emulsion paint include vinyl acetate resin emulsion paints, vinyl acetate-ethylene copolymer emulsion paints, acrylic resin emulsion paints, and epoxy resin emulsion paints.

The optimum amount of additive varies with a particular type of paint composition. Preferably the additive is added such that the paint composition may contain 0.01 to 5% by weight, especially 0.05 to 2% by weight of the triglycerol-modified silicone compound.

Less than 0.01% of the compound would be less effective for eliminating coating defects whereas more than 5% by weight of the compound gives no additional advantages and sometimes causes a loss of coating strength or the like.

We have found that these additives are well compatible or miscible with aqueous paint compositions and, in small amounts, effective for reducing the surface tension of aqueous paint compositions and thus ensuring formation of satisfactory smooth coatings free of craters, cissing and pinholes.

EXAMPLE


Examples of the present invention are given below by way of illustration.



It is first described how to synthesize a triglycerol-modified silicone compound.

Synthesis Example

A 1-liter glass reactor equipped with a thermometer, agitator and condenser was charged with 79.9 grams (0.36 mol) of 1,1,1,3,3,5,5-heptamethyl-3-monohydrogentrisiloxane of formula (6), 324 grams (0.36 mol) of allyl diisopropylidene triglycerol of formula (7), 300 grams of toluene, and 0.1 gram of an ethanol solution of chloroplatinic acid. With toluene refluxing, reaction was continued for 50 hours. At this point, the completion of reaction was confirmed by determining the amount of $\equiv\text{SiH}$ remaining in the reaction solution. Then the toluene solvent was distilled off in vacuum, yielding 398 grams of an organosilicone compound of formula (8).

On measurement, the resultant compound was found to have a viscosity of 32.7 centistokes at 25°C and an index of refraction of 1.4384. By ^{13}C -NMR, it was identified to have the following structure.




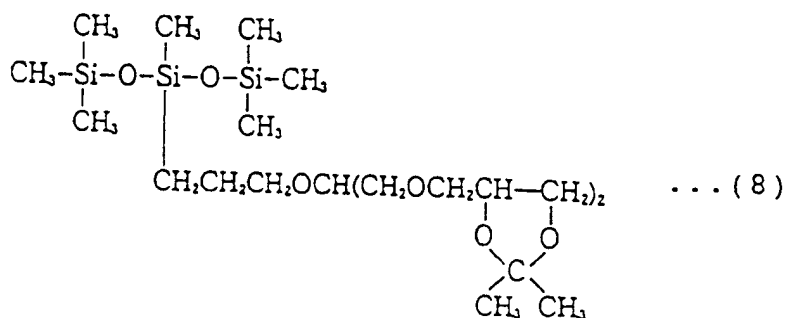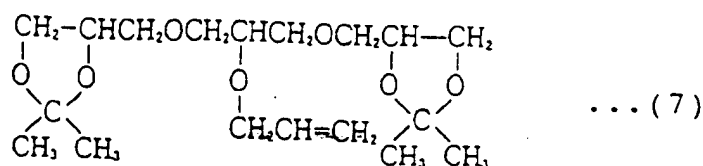

A similar 500-cc glass reactor was then charged with 100 grams of the compound of formula (8), 100 grams of ethanol and 100 grams of 0.01N hydrochloric acid. Acetone removing reaction was performed at 50 to 60°C for three hours. At the end of reaction, the hydrochloric acid, water, ethanol and acetone were distilled off at 100°C/50 mmHg, yielding 79 grams of a triglycerol-modified silicone compound (S-1) represented by Formula (9).


On measurement, this compound was found to have a viscosity of 9,500 centipoise at 25°C and an index of refraction of 1.4679. By ¹³C-NMR, it was identified to have the following structure.

S - 1

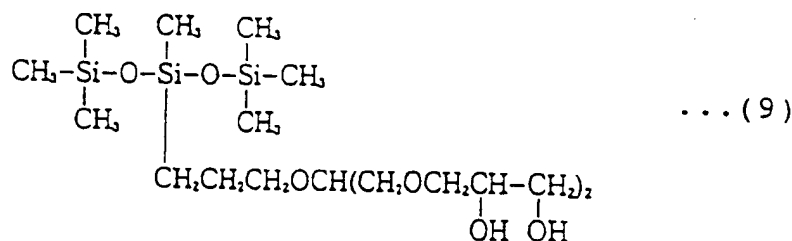


By following the above procedure, there were prepared triglycerol-modified silicone compounds (S-2) to (S-6) shown below.


S - 2

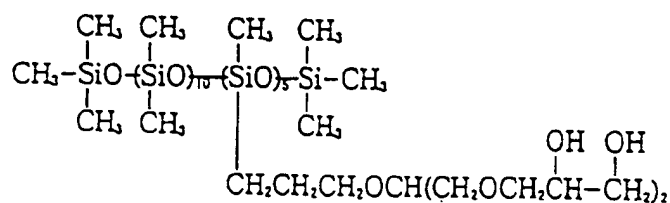


S - 3

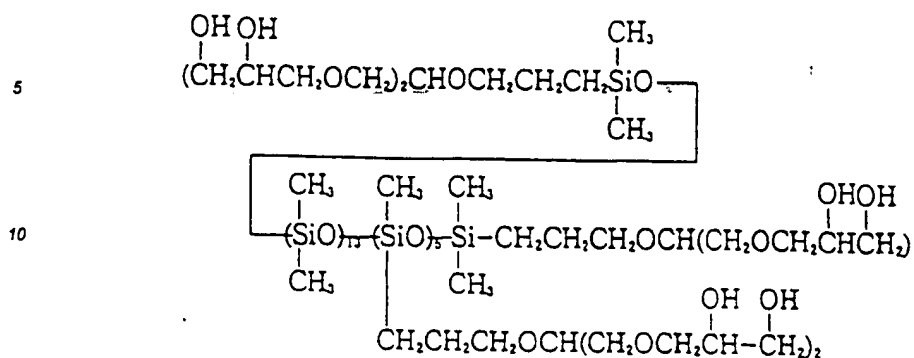


S - 4

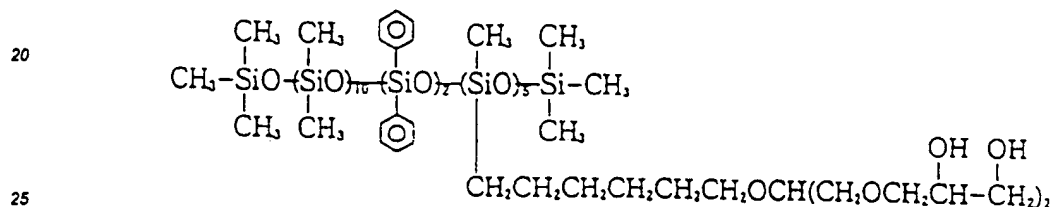

S - 5

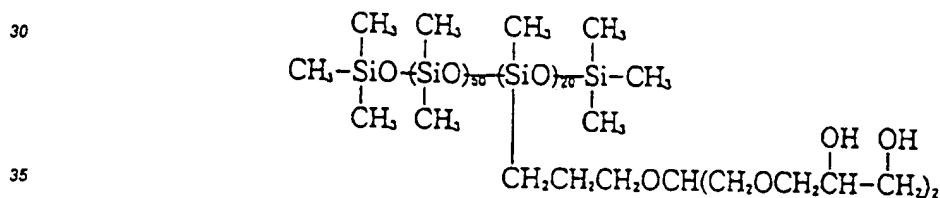

S - 6

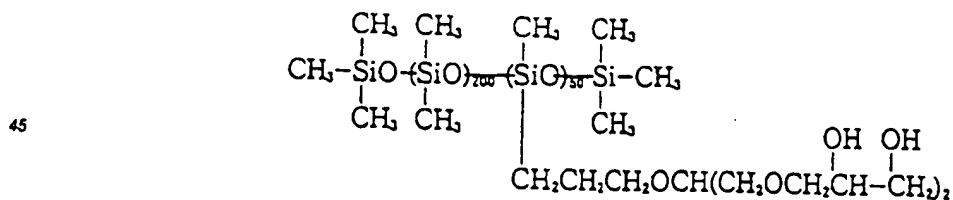

Examples 1-6


Aqueous paint additives were prepared by diluting triglycerol-modified silicone compounds (S-1) to (S-6) from Synthesis Example with isopropyl alcohol to a concentration of 30% by weight. A 1% aqueous solution of each additive was measured for surface tension. The results are shown in Table 1.

To a polyvinyl alcohol (PVA) paint composition in the form of a 5% aqueous solution of partially saponified polyvinyl alcohol (degree of saponification 88 mol%, commercially available as PA-18 from Shin-Etsu Chemical Co., Ltd.), each of the additives was added in a concentration of 0.5% by weight calculated as each compound (S-1) to (S-6). Each paint composition was then cast on a glass plate and air dried for 24 hours. The outer ap-

pearance of the coating was observed. The results are also shown in Table 1.

Comparative Examples 1-2

The same evaluation as in Examples was made in Comparative Example 1 where a poly-ether-modified silicone compound of the following average formula:

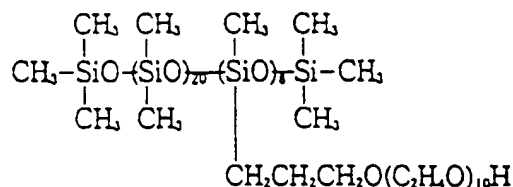

was used as the additive and in Comparative Example 2 where no additive was used.

Table 1


		Type of silicone compound	Surface tension of 1% aqueous solution (dyne/cm)	Surface tension of PVA paint (dyne/cm)	Coating appearance
Example	1	S-1	21.9	22.0	Good
	2	S-2	21.0	21.3	Good
	3	S-3	22.4	22.5	Good
	4	S-4	20.9	21.1	Good
	5	S-5	20.8	20.9	Good
	6	S-6	20.5	20.7	Good
Comparative Example	1	polyether silicone compound	24.1	26.8	craters
	2	none	72.0	42.4	craters

As seen from Table 1, where triglycerol-modified silicone compounds are used as the additive, the aqueous paint compositions are reduced in surface tension and thus improved in wetting as compared with Comparative Examples, resulting in acceptable coatings free of craters.

Although some preferred embodiments have been described, many modifications and variations may be made thereto in the light of the above teachings.


Claims

1. An aqueous paint additive comprising as an active ingredient a triglycerol-modified silicone compound of the following general formula (1):

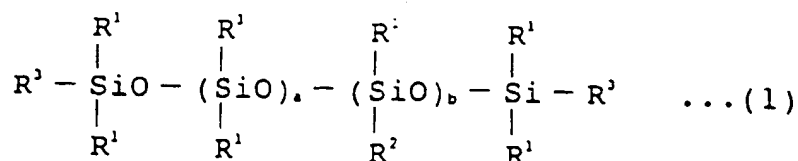

wherein R¹ is a monovalent hydrocarbon group having 1 to 10 carbon atoms,


R² is a group of the following formula (A):




wherein Q is a divalent hydrocarbon group having 2 to 10 carbon atoms,

R³ is a monovalent hydrocarbon group having 1 to 10 carbon atoms or a group of formula (A), and letters a and b are positive integers inclusive of 0, with the proviso that at least one of the R³ groups is a group of formula (A) when b is equal to 0.

2. An aqueous paint composition comprising an water-soluble paint composition using water as a main diluent or an emulsion paint composition using water as a dispersing medium, and an additive comprising a triglycerol-modified silicone compound of the following general formula (1):

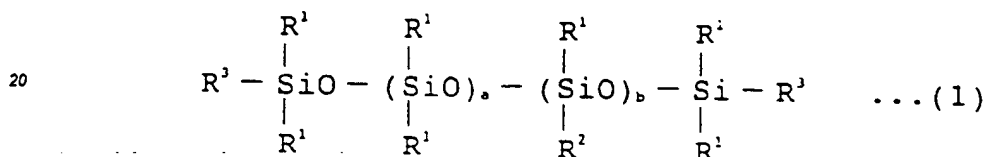

wherein R¹ is a monovalent hydrocarbon group having 1 to 10 carbon atoms,
R² is a group of the following formula (A):



wherein Q is a divalent hydrocarbon group having 2 to 10 carbon atoms,

R³ is a monovalent hydrocarbon group having 1 to 10 carbon atoms or a group of formula (A), and letters a and b are positive integers inclusive of 0, with the proviso that at least one of the R³ groups is a group of formula (A) when b is equal to 0.

3. The aqueous paint composition according to claim 2, wherein the aqueous paint composition contains 0.01 to 5% by weight of the triglycerol-modified silicone compound of formula (1).



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 93 30 5010

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
A	EP-A-0 265 807 (GOLDSCHMIDT) * claim 1 *	1	C09D5/02 C09D7/12 C08L83/06
A	EP-A-0 403 913 (HENKEL) * claim 1 *	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 5)
			C09D C08L C08K
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 November 1993	Examiner LENTZ, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1504/91 (P0101)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.